




# PC12-7.2 12V7.2Ah

The battery is constructed by plates, separators, safety valves and container. Since the electrolyte is held by a glassmat separator and plates, the battery can use in any direction and position without leakage

## Outer Dimensions

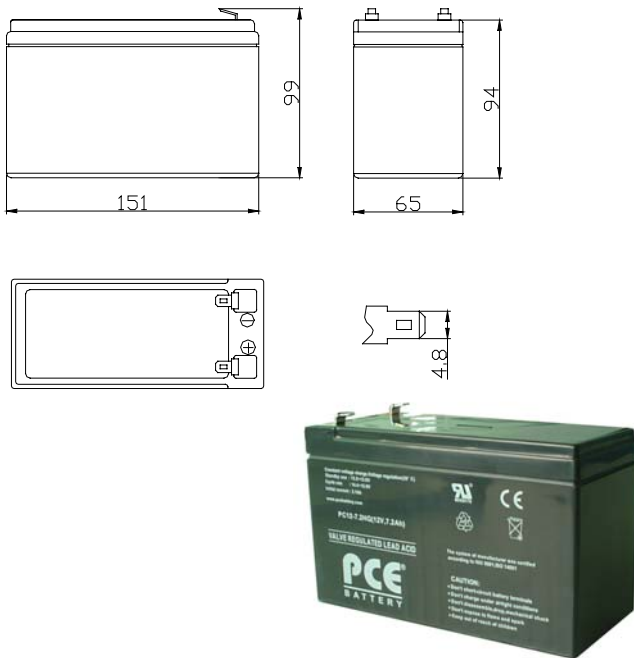

## Performance Characteristics

Nominal Voltage .....	12V
Number of cell .....	6
Design Life .....	3~5 years (at 25°C)
Nominal Capacity 77°F(25°C)	
20 hour rate(0.36A,10.5V) .....	7.2Ah
10 hour rate(0.66A,10.5V) .....	6.6Ah
5 hour rate(1.22A,10.5V) .....	6.1Ah
1 hour rate(4.68A,9.6V) .....	4.68Ah
Internal Resistance	
Fully Charged battery 77°F(25°C) .....	40mΩ
Self-Discharge	
3% of capacity declined per month at 20°C(average)	
Operation Temperature Range	
Discharge .....	-20~60°C
Charge .....	-10~60°C
Storage .....	-20~60°C
Max. Discharge Current 77°F(25°C) .....	108A(5s)
Short Circuit Current .....	360A
Charge Methods: Constant Voltage Charge 77°F(25°C)	
Cycle use .....	14.5-15.0V
Maximum charging current .....	2.16A
Temperature compensation .....	-30mV/°C
Floating .....	13.4-13.8V
Temperature compensation .....	-20mV/°C

## Dimensions and Weight

Length (mm / inch) .....	151 / 5.94
Width (mm / inch) .....	65 / 2.56
Height (mm / inch) .....	94 / 3.70
Total Height (mm / inch) .....	99 / 3.90
Approx. Weight (kg / lbs) .....	2.3 / 5.06







## Battery Constructions

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	UL94V2	UL94V2	Rubber	Copper	Fiberglass	Sulfuric acid

## Charging Methods

Application	Charging method	Charging Voltage at 25°C	Temperature compensation coefficient of charging voltage	Max. charging current	Charging time 25°C(h)		Temp (°C)
					100% discharge	50% discharge	
For Floating service	Constant voltage & Constant Current Charging (with current restriction)	13.4-13.8V	-20 mV/°C	2.16A	24	20	(0~40°C) (32~104°F)
For cycle service		14.5-15.0V	-30 mV/°C	2.16A	16	10	

\*Temperature compensation of charging voltage is not needed when using the batteries within 15°C to 35°C range.

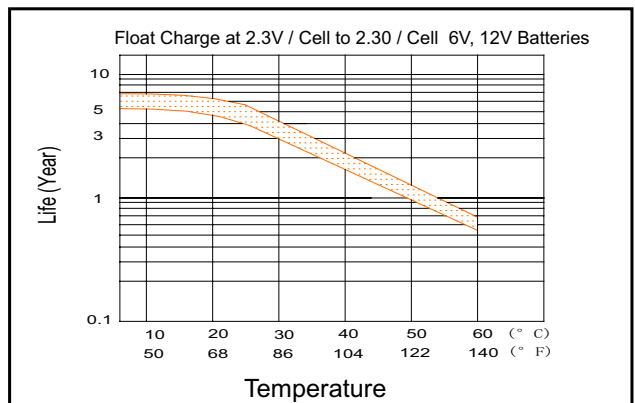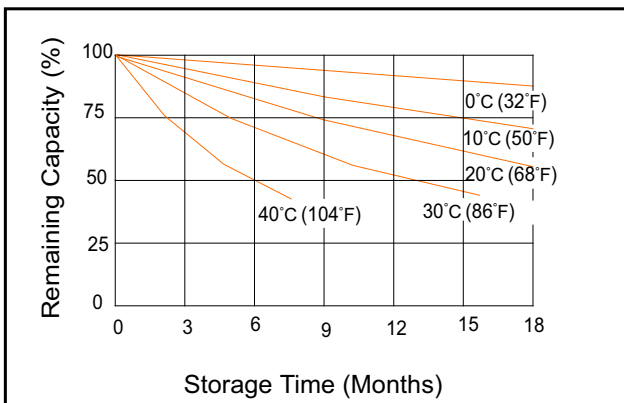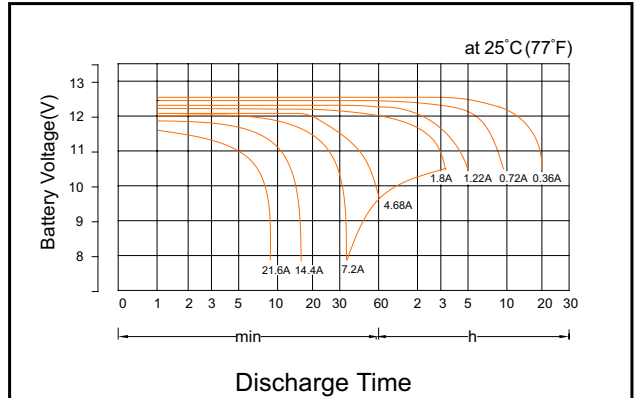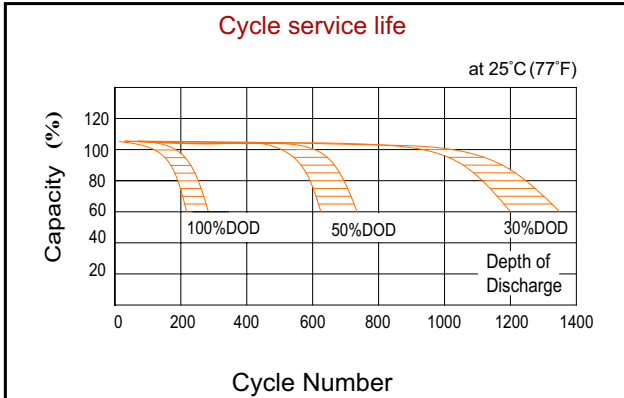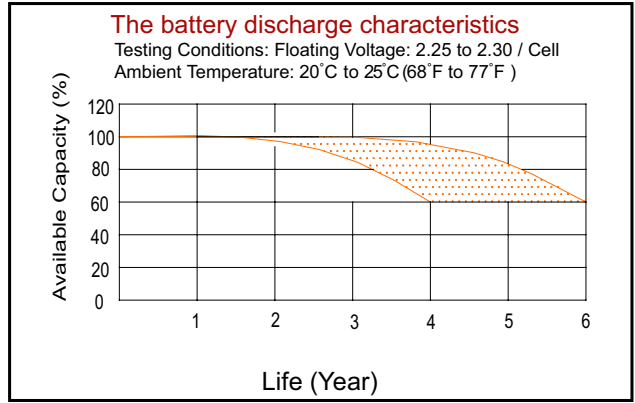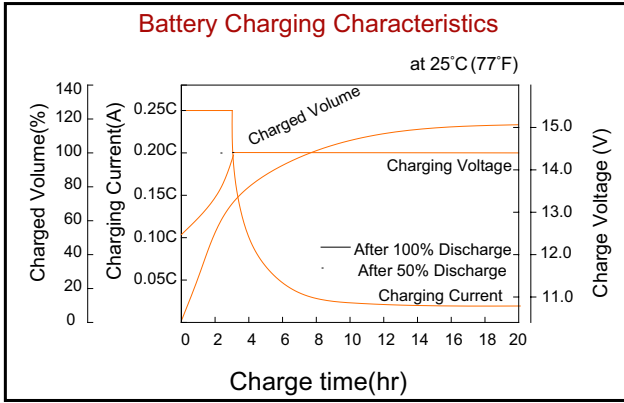

### Discharge Constant Current (Amperes at 77°F/25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	25.2	20.2	14.4	8.28	5.90	4.68	2.52	1.82	1.23	0.81	0.68	0.37
1.65V	24.5	19.4	13.7	8.14	5.83	4.65	2.50	1.81	1.23	0.81	0.68	0.37
1.70V	23.0	18.0	13.0	7.92	5.76	4.61	2.49	1.80	1.22	0.80	0.67	0.36
1.75V	20.2	15.1	12.2	7.49	5.69	4.54	2.45	1.78	1.22	0.80	0.67	0.36
1.80V	18.0	13.0	11.5	6.48	5.62	4.46	2.38	1.73	1.21	0.80	0.66	0.35

### Discharge Constant Power (Watts/Cell at 77°F/25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	45.9	36.8	26.5	16.0	11.2	9.00	4.83	3.52	2.39	1.57	1.32	0.72
1.65V	44.0	35.3	25.1	15.5	11.1	8.86	4.81	3.50	2.38	1.57	1.31	0.72
1.70V	41.9	33.2	23.9	14.8	10.9	8.86	4.76	3.48	2.37	1.57	1.31	0.71
1.75V	36.7	28.0	22.5	13.9	10.8	8.71	4.70	3.44	2.37	1.55	1.30	0.70
1.80V	32.8	25.2	21.3	12.0	10.7	8.57	4.56	3.33	2.35	1.55	1.28	0.69



**PCE BATTERY INDUSTRIAL**

4805 Colombo Mississauga, ON L5M 7R3, Canada

Tel: 1(905) 607-2552 Fax: 1(905) 607-9811 sales@pcebattery.com

WWW.PCEBATTERY.COM