

Vista

650~1200VA

- Line-Interactive design
- Fully digitized microprocessor control
- Auto Voltage Regulation-AVR
- 50/60 Hz frequency auto-sensing
- Space- saving compact size
- Energy-saving function (UPS sleep mode)
- Cold start function (DC Power On)
- Self-Restartable on AC input power recovery
- Lightning and surge protection
- Advanced Battery Management (ABM technology)
- Automatic diagnostics & battery check
- Automatic charging when UPS is off
- Back up, line & battery status display
- USB & RJ45 communication port*

* Select models only



PCE[®]
UPS SYSTEMS


**YOUR ULTIMATE
POWER PROTECTION PARTNER**

www.pceups.com

Model Vista Series		Vista-650E	Vista-850E	Vista-1200E
Output power		650VA/ 360W	850VA/ 480W	1200VA/ 720W
Input	Voltage	220V/230V/240V		
	Voltage Range	165~280VAC		
Output	Voltage (on battery)	220V/230V/240V +/-10%		
	Frequency (on battery)	50 or 60Hz +/- 1 Hz		
	Output waveform	Modified Sinewave		
	Transfer Time	4 to 8 milliseconds, including detection time		
	Protection	Discharge, overcharge and overload protection		
LED Indicators	Normal Mode	N/A	Green Lighting	
	AC Mode	Green Lighting		
	Battery Mode	Green Flashing		Yellow Flashing
	Fault	N/A	Red Lighting	
Audible Alarm	Battery Back up	Slow beeping sound (every 10 sec)		
	Battery Low	Rapid beeping sound (every 1 sec)		
	Overload	Rapid beeping sound (every 0.5 sec)		
	Fault	Continuous beeping sound		
Battery	Type	Sealed lead acid, maintenance free, with 3-5 years lifetime		
	DC Voltage	12VDC	24VDC	
	Typical Recharge Time	6 hours (to 90% full capacity)		
	Protection	Automatic self-test discharge protection		
	Back up Time	30 min		
Communication	USB	N/A	Detect battery low, schedule UPS On/Off, AC input/output power status display	
	RJ45	N/A	Available RJ45 communication port	
	Compatibility	N/A	Novell, Windows 95 / 98 / ME / NT/Vista / 2000 / XP / 2003	
Physical	Receptacles	Optional country specific receptacles		
	Dimensions (WxDxH) mm (inch)	100 x 278 x 143 (3.9"x 10.9"x 5.61")		139 x 365 x 195 (5.45"x 14.3"x 7.64")
	Shipping Weight Kg (lbs)	4.4(9.68)	5(11)	8.6(18.92)
Environment	Ambient Operation	3,500 meters max. elevation, 0-95% humidity non-condensing, 0-40°C		
	Audible Noise	<40dBA(1 meter from surface)		
	Storage Condition	15,000 meters max.		
certifications	Safety	EN 50091-1-1/EN 69050 (RD), IEC 60950		
	Electromagnetic compatibility	EN 50091-2, EN 50022/B, IEC 62040-2, IEC 61000-3-2, IEC 61000-3-3		
	Design, production & services	ISO 9001		
	Environment	ISO 14001 certified company		
	Marking & Certifications	CE,TUV,GC-Mark		

*Specifications may change without further notice

Vista-650E/ Vista-850E

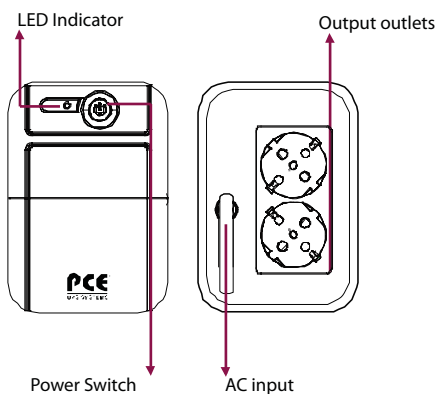

Vista-1200E

